

## QuickPort® 1-Port Surface Mount Housing

### APPLICATION

Compact housing for 1-port surface mounting of QuickPort® snap-in modules. Use to support voice/data applications in open office, retrofit or other surface mount environments. (Connectors sold separately.)

### STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: cULus Listed; complies with NEC® Article 800.

### PHYSICAL SPECIFICATIONS

Capacity: 1 snap-in module  
Materials: High-impact, fire-retardant plastic rated UL 94V-0  
Dimensions: 1.42"H x 2.29"W x 1.00"D  
Mounting: Use screws (included) or adhesive tape (included).

### DESIGN CONSIDERATIONS

- Very small footprint.
- Specify whether the product will mount with adhesive tape or screws.
- Specify bottom or rear cable entry. (Rear entry is recommended to help meet cable bend radius standards.)
- Specify port identification method (colored modules, designation labels, and custom silkscreening are available). ID ports use different colored connector for each application (13 TIA/EIA-606 compatible colors are available), or Leviton's pre-printed Port Designation Labels.

### UNIQUE FEATURES

- Very small footprint/profile.
- The housing base functions as a punchdown platform for stabilizing connectors during termination.
- If desired, connector can be pre-terminated prior to snapping into housing.
- Detailed installation instructions are included in the carton.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



For ELECTRONIC Typical Specs see (.TXT) file on disk.

### TYPICAL SPECIFICATION

Surface mount telecommunications outlet housings shall be a high-density low profile design with one field-configurable port, snap-lock cover, and cable knockout on back. Housing cover shall have raceway knockout for bottom or rear entry. Base shall include Tie-wrap anchor point at all cable entrance. The housing shall be mountable with screws or tape. The cover shall provide the option of securing it to the base with a screw that is hidden under the outlet identification window. Color to be specified per schedule on plan. Must be constructed of high-impact self-extinguishing plastic rated UL 94V-0, and be cULus Listed and compliant with FCC Part 68 and TIA-568-B specifications. The manufacturer shall provide a standard one-year limited product warranty and a 15-year performance guarantee. A lifetime warranty against defects in material and workmanship shall be provided by the manufacturer when installed in a certified system.

### WARRANTY INFORMATION

- One-year limited product warranty and 15-year performance guarantee are standard.
- Product and performance warranties are extended to a Lifetime as part of Leviton's Certified Cabling System.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005  
Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).

2222 - 222nd St. SE • Bothell, WA 98021 USA  
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available




# QuickPort® 1-Port Surface Mount Housing

Part Number  
41089-1XP


.....

## DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images  
(.DXF, .DWG, MS-DOS.EPS)

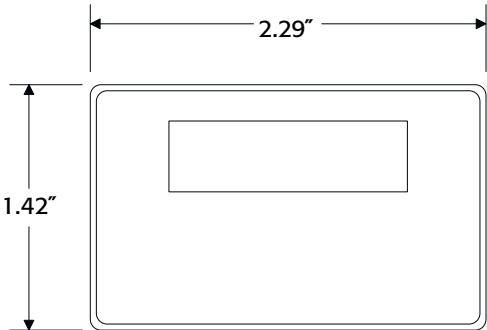

Front View



Side View

## PART NUMBER

| Description                  | Part No.  |
|------------------------------|-----------|
| 1-Port Surface Mount Housing | 41089-1*P |

\* = color: Ivory (I), White (W), Grey (G), Black (E)



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.  
Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available